



## Repairing LG L1200 Keypad

### Tools used in this guide

- [Plastic Opening Tools](#) (1)
- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)

This guide will help you replace the keypad of the phone.



## Step 1 - Logic Board

- Make sure you remove the battery by lifting the tab on the back of the phone before opening the case.
- Poke out rubber covers using a spudger or pointy object, such as a thumb tack.



## Step 2

- Use a T6 torx screwdriver to unscrew the 6 screws that hold the back casing on.



## Step 3

- Use iPod opening tool to separate back housing.
- There are two tabs located on either side of the phone.





## Step 4

- Separate the back housing from the phone.
- Be careful not to rip out the wire (highlighted in yellow) when separating the back housing.




## Step 5

- Use a spudger to disconnect antenna wire.



## Step 6

- Use the iPod opening tool to pop out the logic board.

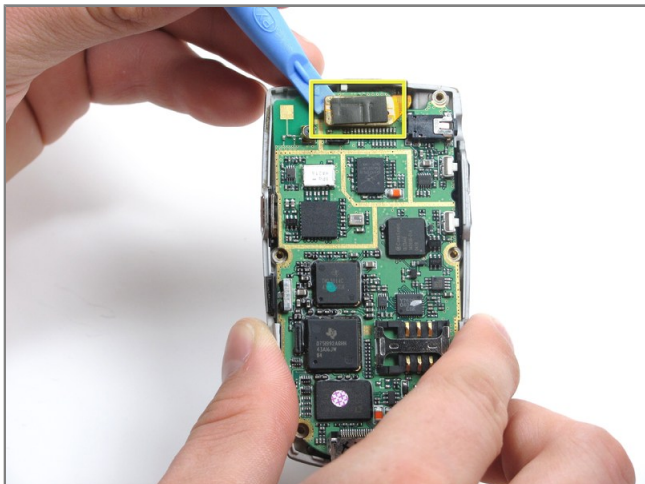


### Step 7

- Use the iPod opening tool to disconnect the main ribbon.



### Step 8

- Once the ribbon is detached, remove the logic board and replace if necessary.

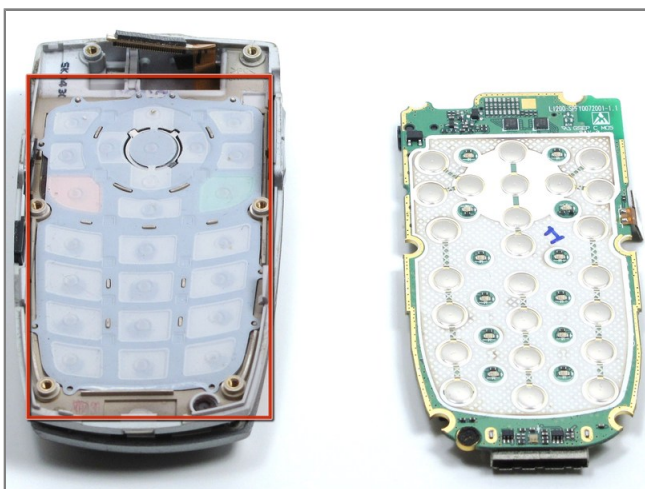

### Step 9 - Keypad

- The back of the keypad is shown here, next to the logic board (the logic board is turned over to expose the buttons).



### Step 10

- Using a spudger, lift the keypad off of the tabs.



To reassemble your device, follow these instructions in reverse order.

This document was last generated on Dec 14, 2010.